


3-6GHz Coaxial Circulator CC2528CS-3-6

Technical Specifications

- Model: CC2528CS-3-6
- Frequency Range: 3-6GHz
- Insertion Loss: 0.50dB Max.
- VSWR: $\leq 1.30:1$
- Isolation: $\geq 18\text{dB}$
- Impedance: 50 Ohms
- Forward Power: 150Watts CW
- Reverse Power: 150Watts
- Connector Type: SMA Female
- Operating Temperature: $-30^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- Size: 28*25.4*15mm



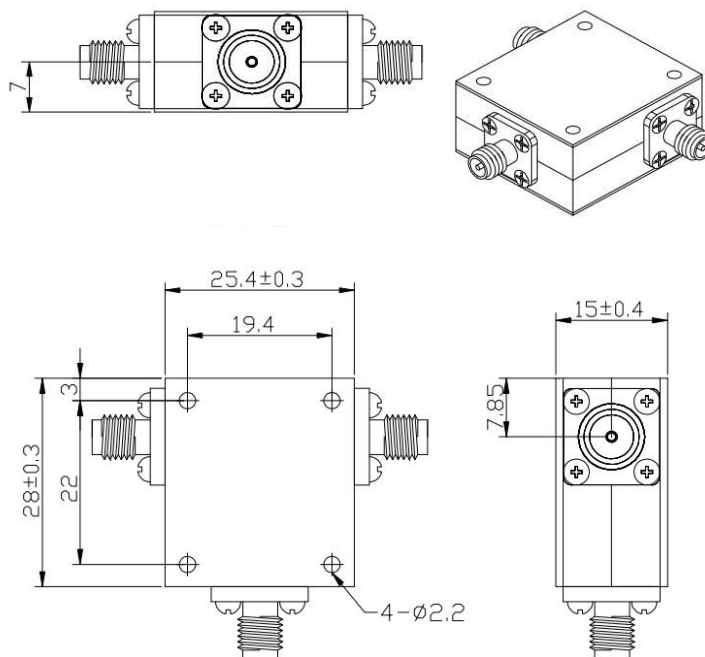


3-6GHz Coaxial Circulator CC2528CS-3-6

E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

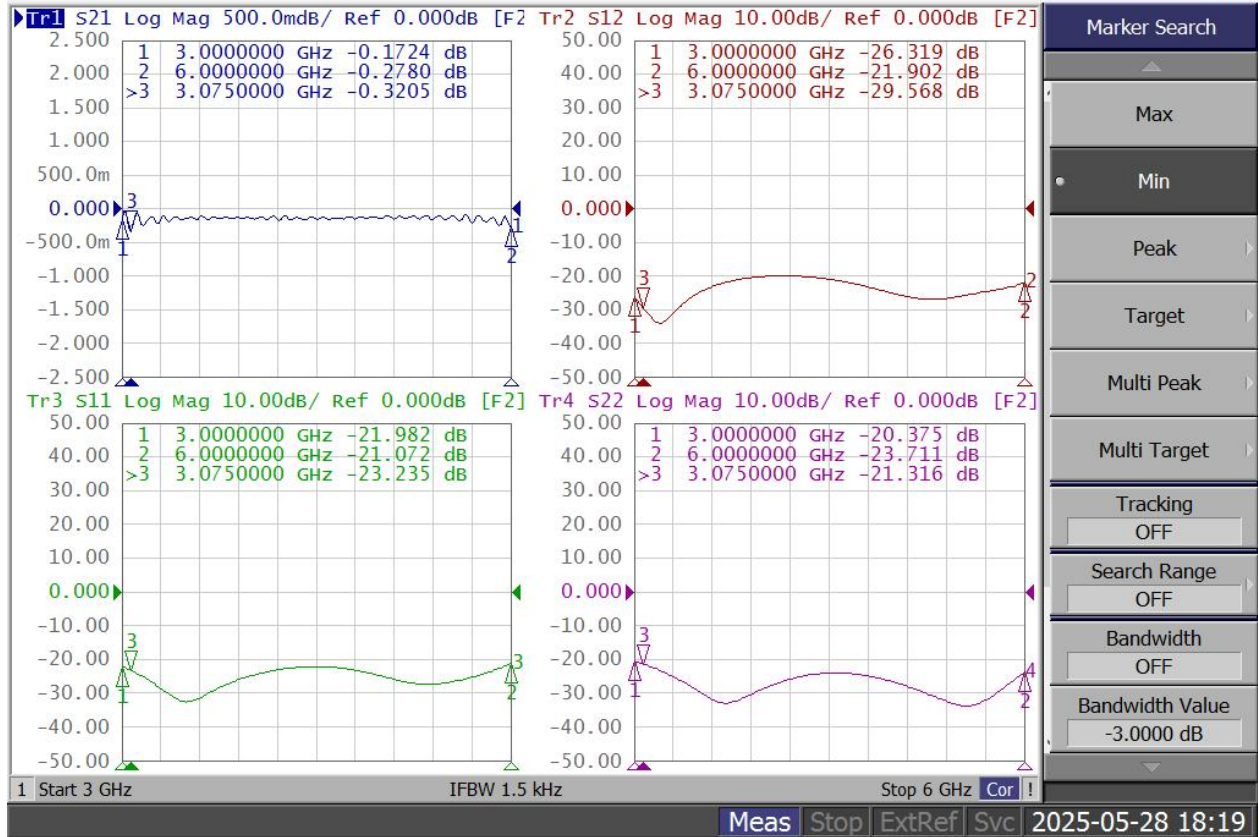

E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

